


DX08 digital control interface features eight (8) 1-Amp transistor (FET) outputs. Ideal for operating relays & contactors in panels, DC powered solenoid and irrigation valves, etc. Six (6) of the outputs are capable of 1kHz PWM functions for integration with dimmable lighting and variable speed motor controllers.

Connects instantly to Agrowtek's master control systems or intelligent sensors via a GrownET port for advanced automated control functions. GrownET port accepts MODBUS RTU communication for PLC control.

LED indicators on the front panel provide status of power supply and data communications. Designed for DIN rail mounting in control cabinets.

UL Listing pending.

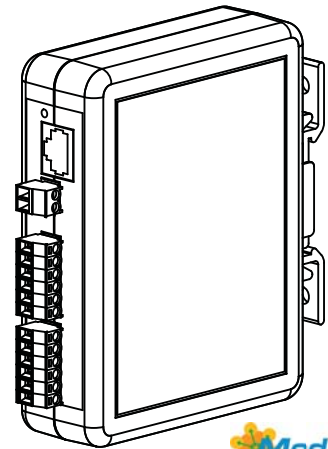

Features



Eight (8) 1-Amp Transistor Outputs



Six (6) PWM Channels 10-90% @1kHz



Built-In Flyback & Transient Suppression on FET outputs



GrownET™ Digital Communication Port





MODBUS RTU for industrial PLC applications
9-24Vdc, DIN rail mount



Made in USA



1-Year Warranty

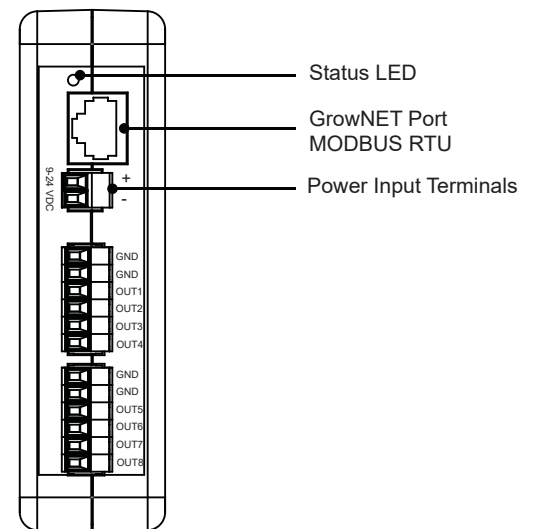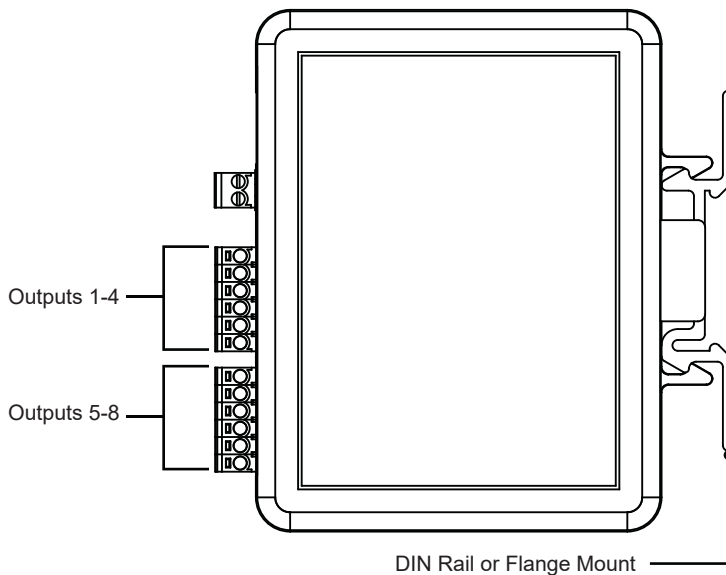

Electrical Process Control Equipment
File No.: E516807

Dimensions:
4.5" H x 1.3" W x 4.1" D

Applications



Irrigation Solenoid Valves



Custom Equipment & Sensors



Relay Control
Load control in buildings & greenhouses



Variable Speed Fans & Motors

GrowControl™ GCX Controller



Connect to GrowControl™ Cultivation Controllers for advanced functions as part of a complete facility control solution. GrowControl™ GCX systems feature intelligent control functions optimized for today's complex growing environments.

USB



Connect GrowNET™ devices directly to a computer using the LX1 USB AgrowLINK™ and free PC software for data logging and monitoring.

MODBUS



GrowNET™ devices are easy to implement on PLC systems with MODBUS RTU and a LX2 ModLINK™ interface. Multiple GrowNET™ devices can be connected to an interface with HX8 GrowNET™ hubs.

Ordering Options

DXIO

No Options

Optional Accessories



LX1
USB
AgrowLINK™



LX2
RS-485
ModLINK™



HX8
GrowNET™
Device Hub