








Expand the number of GrowNET™ ports on your GrowControl™ GCX Cultivation Control System's GrowNET™ digital device network or connect GrowNET™ devices to a master device such as an LX1 USB AgrowLINK™ for PC or LX2 MODBUS ModLINK™ for PLC applications.


Buffered hub extends the range of bus networks and can provide power to devices through the GrowNET™ ports from the DC power jack. 15kV ESD rated ports with hot swap and short circuit fault protection to prevent port damage. Includes eight ports for connecting devices and one port for connecting to the upstream bus.

Hubs may be daisy-chained as required up to the maximum number of ports on a bus (247 MODBUS / 100 GrowNET™.) Transceivers on every port provide full signal strength and noise immunity to every device resulting in highly robust communications across large networks of devices.



Features

-  8 GrowNET™ ports for devices sensors, relays, pumps, etc.
-  Processor Buffered Communication for Enhanced Reliability
-  Provide power to sensors & relays from the hub ports
-  Buffered ports for signal strength
-  1-Year Warranty
-  15kV ESD & hot swap protection Tough ABS plastic enclosure
-  Made in USA

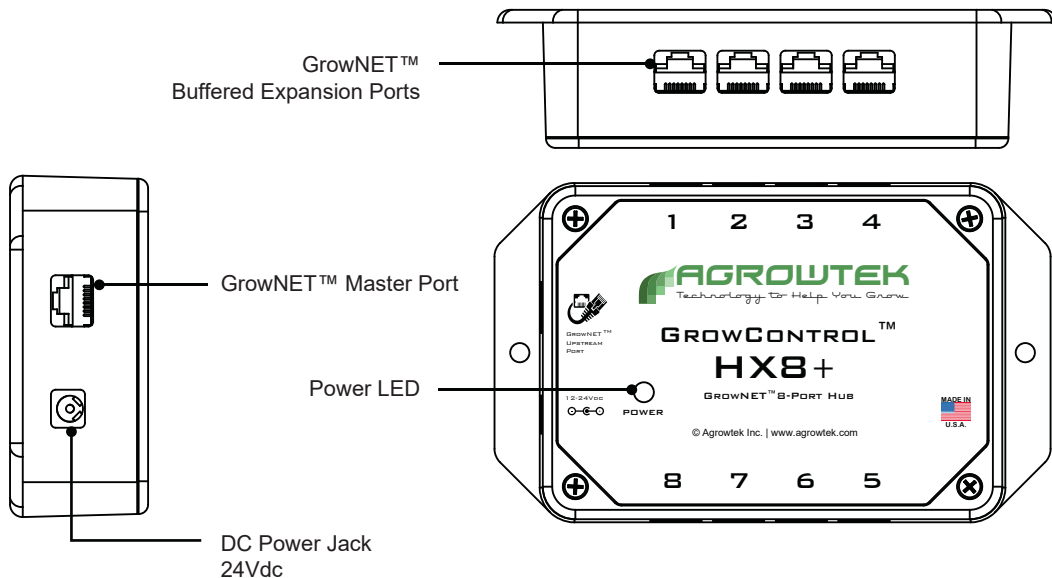

Un-used ports may be plugged with GrowNET™ sealing port plugs.



Electrical Process Control Equipment
File No.: E516807