


## 1. Mount the Relay & Sensor

Remove the cover of the relay and use the mounting holes in the rear of the enclosure to securely mount to a wall surface near the AC power supply source. Mount the SXE climate sensor to a wall surface that is accessible and has good air circulation. *See mounting instructions.*

## 2. Connect Power to Relay

If the MCX4 was ordered with the power cord kit, simply plug the cord into a 120Vac wall outlet.

If there is no power cord installed on the RX4i, one may be installed (14AWG minimum) or the RX4i may be directly wired to a 15A circuit breaker using standard 1/2" EMT conduit and fittings.

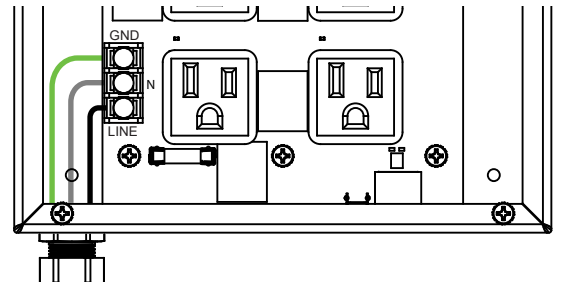

## 3. Connect the GrowNET Cable

Connect the sensor to the relay using the included cross-over ethernet cable as shown in the diagram.



**IMPORTANT! ONLY use cross-over adapters provided by Agrowtek.**  
Incorrect cross-over adapters or cables can cause damage to the equipment.



## 4. Connect Power to the SXE Sensor

Plug the 24Vdc power adapter into the SXE and a 120Vac wall outlet. The SXE sensor will power-on and connect to the RX4i relay.

Follow the LCD Menu Operation instructions for details on setting up the relays to operate based on sensor readings and timers.